



**Aster Chemicals**

## DATASHEET

# SERADOL SA36-200

URETHANE CHEMICALS FOR SLABSTOCK AND COLD CURE MOULDING APPLICATIONS

**U3206**

Revised January 2026


SERADOL SA36-200 is a low monol, low VOC polyether polyol with a high ethylene oxide content used to produce flexible polyurethane slabstock. It is recommended for use in combination with conventional polyether slabstock polyols to produce soft and hypersoft foams. SERADOL SA36-200 can also be used as cell opener polyol in cold cure moulding applications. Performance testing should be conducted before the product is used or brought into contact with HR systems. SERADOL SA36-200 contains a low VOC and amine free antioxidant (AO) package.

### TYPICAL PROPERTIES

PROPERTY	TEST METHOD	UNIT	VALUE
Appearance			Clear Water White Liquid*
Hydroxyl Value	ASTM D4274D	mg KOH/g	36
Density at 20°C	ASTM D4052	kg/l	1.09
Water content	ASTM D4672	% m/m	0.05
Total acidity	ASTM D4662	mg KOH/g	0.3
Flash point	ASTM D93	°C	>200

\*Because of the high ethylene content of this product it may at times appear hazy with a slight colour especially if it has been stored at low temperature. This is a temporary state which will not detract from its performance.

### VISCOSITY/TEMPERATURE CHARACTERISTICS

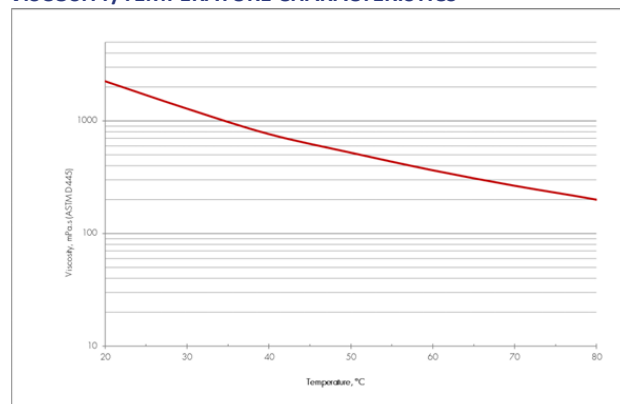

The above typical physical properties are published here as a guide to potential users of the product. A sales specification is published separately.

# SERADOL SA36-200

URETHANE CHEMICALS FOR SLABSTOCK AND COLD CURE MOULDING APPLICATION

## TEST METHODS

ASTM standards are published by the American Society for Testing and Materials at [www.astm.org](http://www.astm.org).

## STORAGE AND HANDLING

SERADOL SA36-200 is slightly hygroscopic and must be stored under conditions so that contamination with water and absorption of moisture are prevented. Contact with copper, copper alloys or zinc must be avoided.

The storage temperature of SERADOL SA36-200 is not critical, in that there will be no hazardous conditions created by the storage of the product at any ambient temperature likely to be encountered. It should be noted however that a normal storage temperature, ensuring optimum processing conditions when using the product, is between 20°C and 25°C and that storage at low temperatures may result in the product viscosity being too high for transfer from the storage container with the pumps available.

SERADOL SA36-200 is a stable product and its processing performance is not expected to deteriorate significantly with time providing it is stored as below. As good industrial practice however it is recommended that it is not stored for periods longer than 2 years.

### Bulk

Tanks should be of stainless steel or of mild steel, free of mill-scale or rust and maintained in a rust-free condition. When desired, the latter can be lined with an epoxide resin paint or zinc silicate paint approved for this service. Small tanks must be fitted with silica gel breathers, inspected and regenerated at regular intervals; large tanks (of volumes greater than 1000 m<sup>3</sup>) should be fitted for blanketing with dry nitrogen. Heating facilities may be necessary and where this is the case, care should be taken to ensure that heating coil skin temperatures do not exceed 100°C.

Lines should be of stainless steel or mild steel maintained in a rust-free condition. Trace heating may be necessary in cold climates. Hoses should be of polypropylene, stainless steel or wire bound canvas.

### Drums

SERADOL SA36-200 should be stored in dry conditions away from direct sources of heat, preferably in the unopened original containers. Opened drums must be reclosed tightly immediately after drawing-off material.

## HAZARD IDENTIFICATION

Low order of acute toxicity by the oral or percutaneous routes, neither irritating nor sensitising to the skin. Slightly irritating to the eyes.

This product is not in the 'flammable' range, but will burn.

Before handling the product refer to the Safety Data Sheet.

## PRODUCT CODE

U3206

For further information please contact your local sales representative